


# Linear LED Retrofit

LED Retrofit Kit for T12, T8 and T5

Linear & High Bays

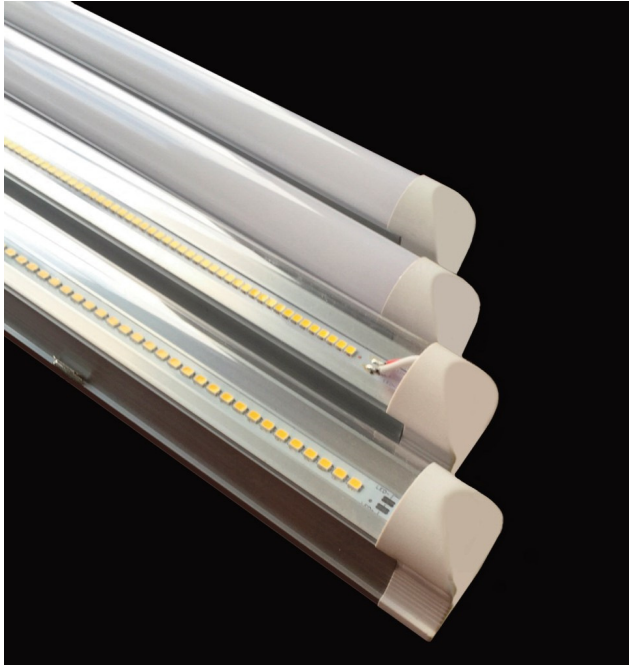

## FEATURES

- **No Ballast – No External Driver – No Lamp Holders**
- DLC listed – LED Retrofit Kit (Not as a tube)
- Fastest retrofit kit installation in the market
- Patented design with magnetic attachment system and optional mechanical attachment
- Delamp with “1 for 2” T8 & T12 retrofit
- Highest lumen per watt packages
- 160 degrees light angle
- 5-year non-prorated warranty
- Connect lights using 2”, 6”, 18” & 36” connectors
- Quick disconnect - no lock out or tag out needed
- “Daisy Chain” connecting up to 240’  
(voltage dependent for 18-gauge wire)



## Technical Specifications


<b>Dimension</b>	2' = (L) 22.562 (W) 1.312" (H) 1.437" 4' = (L) 44.562" (W) 1.312" (H) 1.437"	<b>Weight</b>	2' = 6 oz. 4' = 9 oz.
<b>Housing</b>	Aluminum Extrusion and Poly Carbonate Diffuser	<b>Rated Life</b>	> 65,000 hours
<b>Work Environment</b>	Indoor use (applicable for dry environments) IP50	<b>Operating Temperature</b>	-20 - 60°C (-4 - 140°F)
<b>Kelvin</b>	3500, 4000K & 5000K	<b>CRI</b>	84
<b>Lumen Maintenance 55°C at 9000h</b>	98.89%	<b>Input Voltage/Current</b>	100-300VAC
<b>THD</b>	< 15%	<b>Power Factor</b>	> 0.98

Color	Size	Nominal Power	Lumens/Frosted Lens	Lumens/Clear Lens
<b>4000K*</b>	2' Single Unit	13W	166 lm/w = 2158 lm	
<b>4000K*</b>	<b>3 lamps/fixture</b>	36W	134 lm/w = 4803 lm	
<b>5000K*</b>	2' Single Unit	13W	126 lm/w = 1498 lm	
<b>5000K*</b>	<b>3 lamps/fixture</b>	36W	87 lm/w = 3153 lm	
<b>4000K*</b>	4' Single Unit	12W	172 lm/w = 2100 lm	185 lm/w = 2220 lm
<b>4000L*</b>	<b>2 lamps/fixture</b>	24W	140 lm/w = 3360 lm	156 lm/w = 3744 lm
<b>5000K*</b>	4' Single Unit	18W	125 lm/w = 2230 lm	133 lm/w = 2360 lm
<b>5000L*</b>	<b>2 lamps/fixture</b>	36W	98 lm/w = 3466 lm	104 lm/W = 3674 lm
<b>3000, 4000, 5000K*</b>	4' Single Unit	22W	120 lm/w = 2630 lm	129 lm/w = 2730 lm
<b>3000, 4000, 5000K*</b>	<b>2 lamps/fixture</b>	44W	94 lm/w = 4010 lm	101 lm/w = 4310 lm
<b>3000, 4000, 5000K*</b>	4' Single Unit	24W	148 lm/w = 3475 lm	158 lm/w = 3698 lm
<b>3000, 4000, 5000K*</b>	<b>2 lamps/fixture</b>	46W	127 lm/w = 5893 lm	133 lm/w = 6291 lm
<b>5000K</b>	20" x 45.8" x 3.2"	93W		14,491 lm
<b>5000K</b>	20" x 45.8" x 3.2"	140W		21,671 lm



Connect Power Whip to incoming line voltage and plug into the unit. Existing fixture lamp holders are NOT energized or replaced. No “kits” needed!

Patented high powered magnet system on the back of the unit allows to simply magnetize or screw-in to the existing fixture.

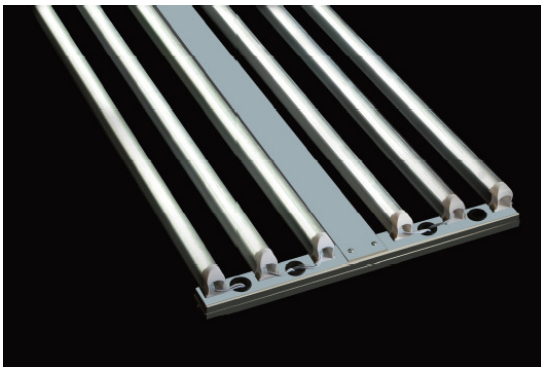

14,000 and 22,000 Lumen High Bay Fixtures (integrated ambient/motion sensor option)



Easy, scalable solution allows for unique custom configurations!

