




Triac Dimmable LED Recessed Slim Panel Series

Features



1. 4inches 9W and 6inches 15W.
2. With **Junction box**, compatible for North America's installation regulation requirement.
3. ETL 5002327 & Energy Star approved 5 years warranty.
4. Triac dimmable.

Parameter

Model No.		
Size	Surface diameter 120mm; Hole size 105mm/4inch Max.	Surface diameter 170mm; Hole size 155mm/6inch Max.
Wattage	9W	15W
LED Type	SMD2835	SMD2835
Luminous Flux	550lm±5%	1000lm±5%
CRI	>85	>85
CCT	3000K/4000K 5000K/6000K	3000K/4000K 5000K/6000K
Lighting Angle	180 Degree	180 Degree
Input Voltage	AC120V	AC120V
Frequency	50/60Hz	50/60Hz
PF	>0.6	>0.6
Dimmable Type	Triac dimmable	Triac dimmable
Material	Aluminum+ acrylic	Aluminum+ acrylic
Surface color	White/Brush nickel/Black	White/Brush nickel/Black
IP Rate	IP40	IP40
Working Temperature	-20~55°C	-20~55°C
Storage Temperature	-40~60°C	-40~60°C
Lifespan	50000h	50000h
Warranty	5 Years	5 Years
Available Shape	Round / Square	Round / Square

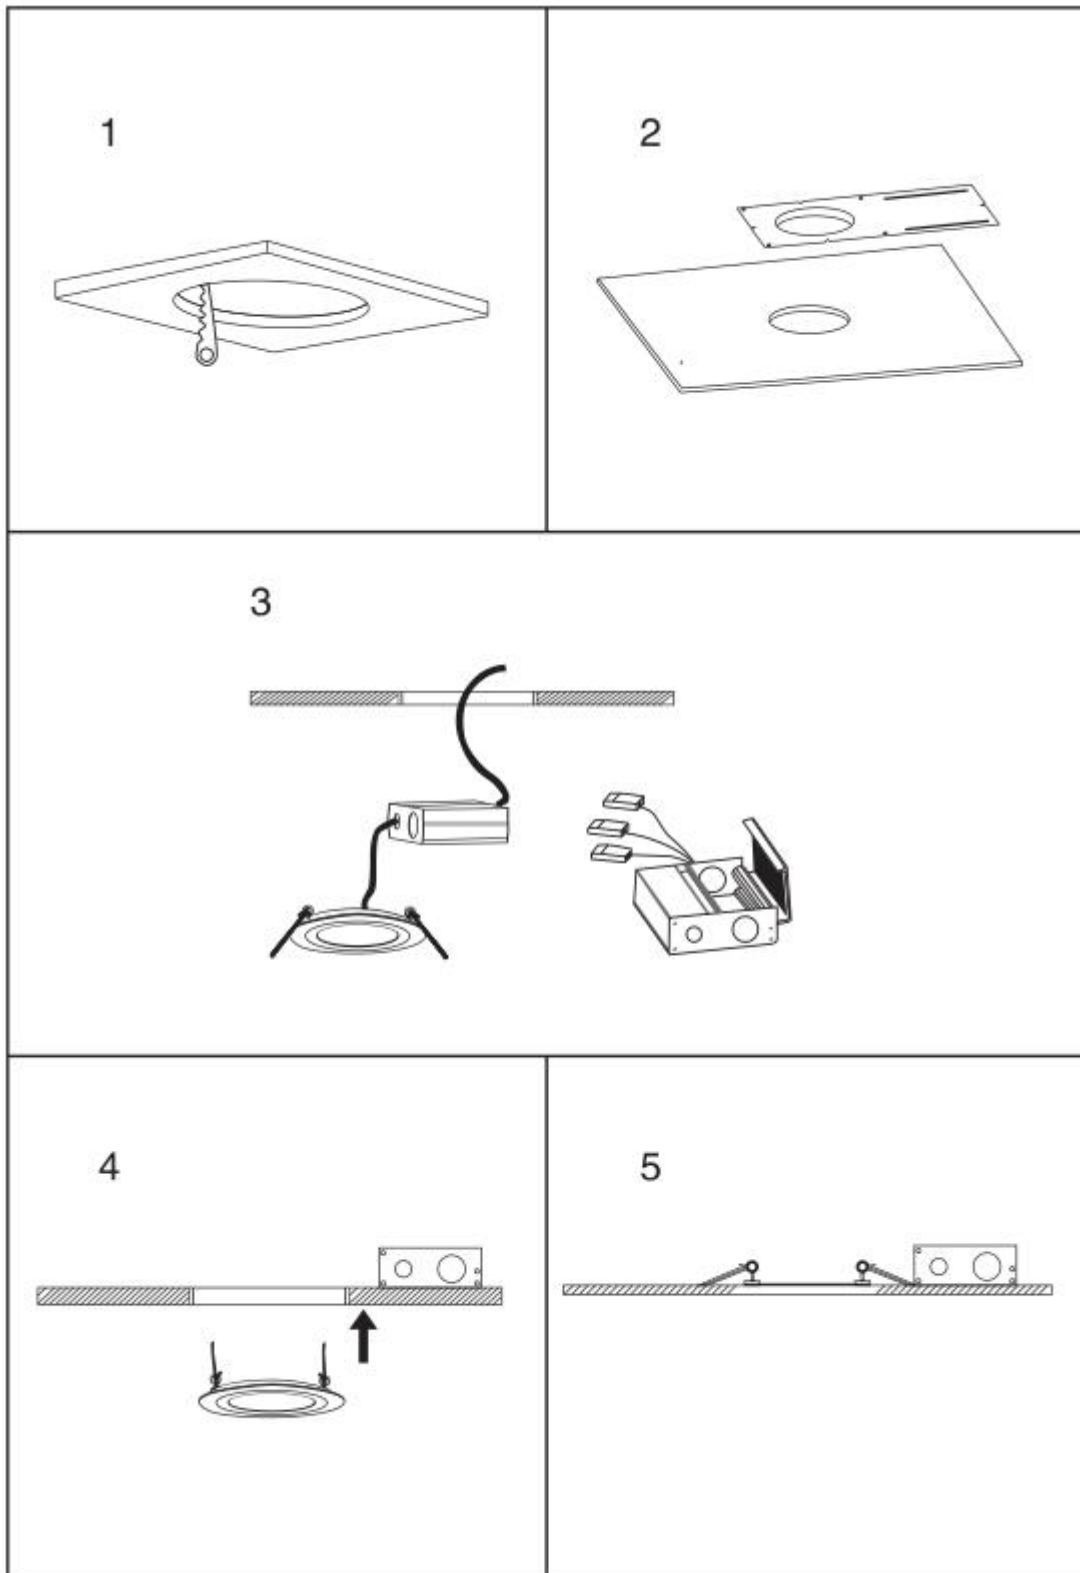

Package

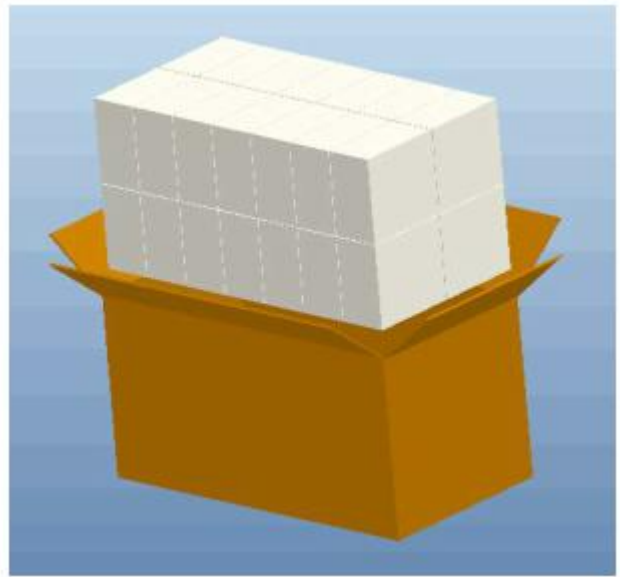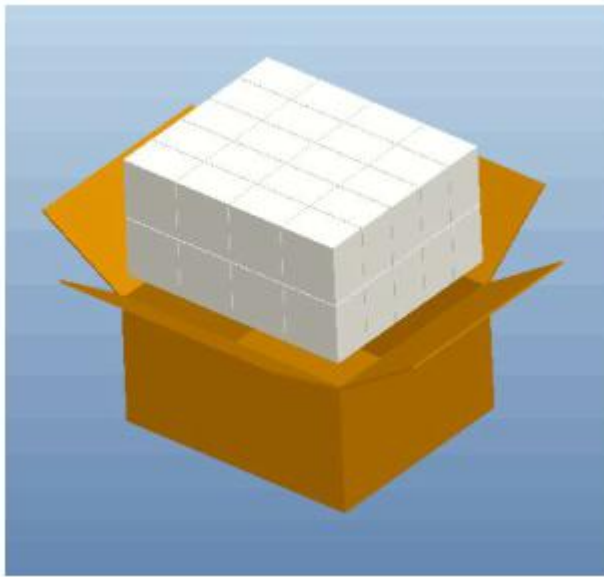

Item	Carton dimension	Quantity	G.W.
4" slim panel	64.5*27*30mm	40 pcs/ctn	14.0kg
6" slim panel	43*42*60.5mm	40pcs/ctn	22.0kg